

FILT LAB

MS-Flo Max



All HVAC and air handling installations with a filtration function.


- Filtration of coarse , Fine and superfine dust.
- Synthetic meltblown wedge-shaped pockets with spacers.

Number of pockets & depth are optional.

Fire protection : Class B as of DIN EN 13 501-1 2007

SPECTATION

Nominal Size W x H x D (in)	Actual Size W x H x D (mm)	No. of Pockets	Filter Class EN779	Rated Air Flow (CMH)	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)
24 x 24 x 21	592 x 592 x 534	10	9	3400	152	450
12 x 24 x 21	287 x 592 x 534	5	9	1700	152	450
24 x 24 x 21	592 x 592 x 534	10	8	3400	138	450
12 x 24 x 21	287 x 592 x 534	5	8	1700	138	450
24 x 24 x 21	592 x 592 x 534	10	7	3400	112	450
12 x 24 x 21	287 x 592 x 534	5	7	1700	112	450
24 x 24 x 21	592 x 592 x 534	10	6	3400	93	450
12 x 24 x 21	287 x 592 x 534	5	6	1700	93	450
24 x 24 x 21	592 x 592 x 534	10	5	3400	72	450
12 x 24 x 21	287 x 592 x 534	5	5	1700	72	450

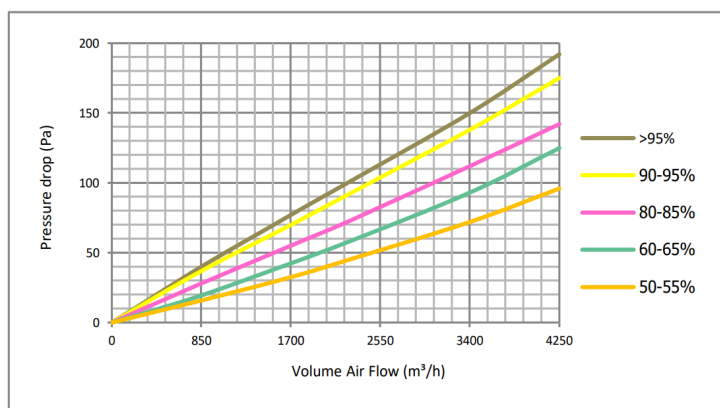

Pressure drop diagram valid for size 592 mm x 592 mm

Operating Condition

Temperature	80°C
Humidity Limit	100%RH

Material

Frame	Galvanized Steel
Filter Media	Synthetic Fiber Fleece